


## BKL band re-saw

The flexible saw that is easy to operate and offers high capacity

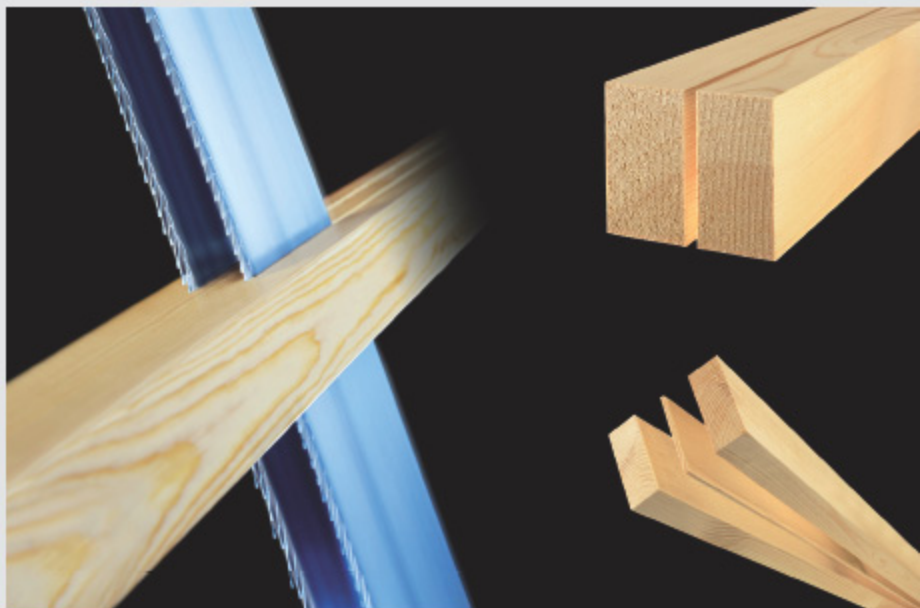


## BKL-for profitable re-sawing

### Technical specification

Feed speed	10-60 m/min
Max distance saw band – fence	235 mm
Max distance saw band – movable side	235 mm
Min distance blade-blade	10 mm
Max cutting height	300 mm
Band wheel diameter	1080 mm
Band wheel width	100 mm
Saw band dimension	6,335 x 110 x 1,0 mm

### BKL – band re-saw

- Hydraulic feed
- Bevel ripping
- Automatic centre splitting, for bevel ripping as well
- Left and right handed version
- Hydraulic band tensioning
- Single sided Isolite band guide system
- Effective band and wheel cleaning

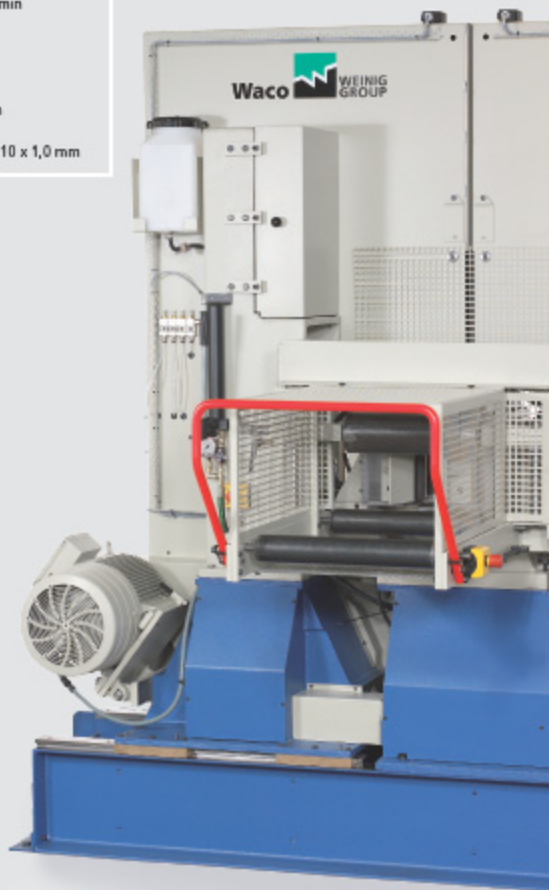



With smallest possible kerf, perfect accuracy, fast settings and safe feed through the BKL –single and twin is the best band re-saw solution. Our focus on production reliability and service friendly design gives you the security requested.



#### 1 Bevel ripping

The feed system can be set for bevel ripping up to 45°. The whole unit, table and feed rollers turn to get perfect stability. Accuracy and high capacity is the result.

#### 2 Operator panel

The saw's basic functions are controlled by the freestanding panel.

#### 3 Hydraulic feed

6 hydraulic feed rollers guarantee an effective feed-through and guidance of the wood. The feed rollers are adjustable in the feed direction and the feed speed is variable without steps.

#### 4 BKL single

Based on your production the BKL comes in both single and twin version.



# BKL band re-saw



WACO JONSEREDS AB  
Box 283  
SE-301 07 Halmstad

Telephone +46 35 17 67 00  
Fax +46 35 17 67 80  
E-Mail [info@waco.se](mailto:info@waco.se)  
Internet [www.waco.se](http://www.waco.se)