
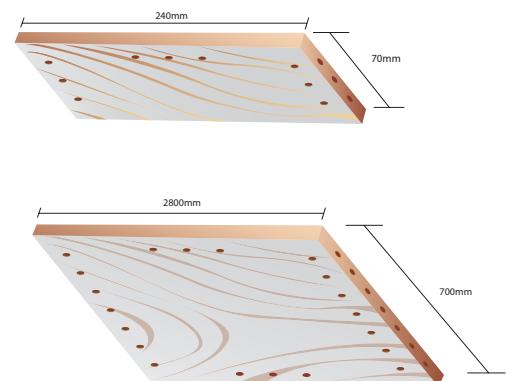
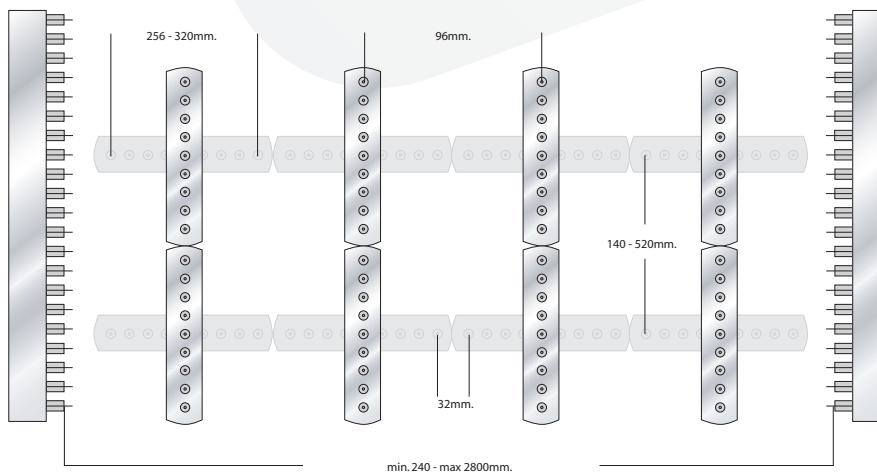


SigmaB2

 **Vitap**
Create Smarter

edition 2018

...manufactured in Italy

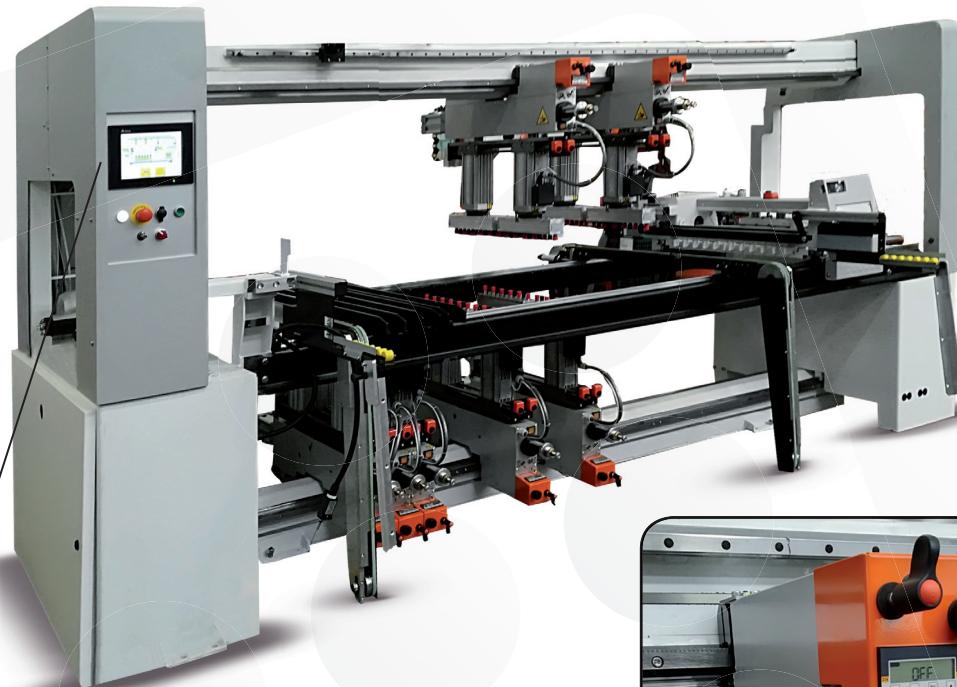


SigmaB2TD

Vitap
Create Smarter

edition 2018

...manufactured in Italy

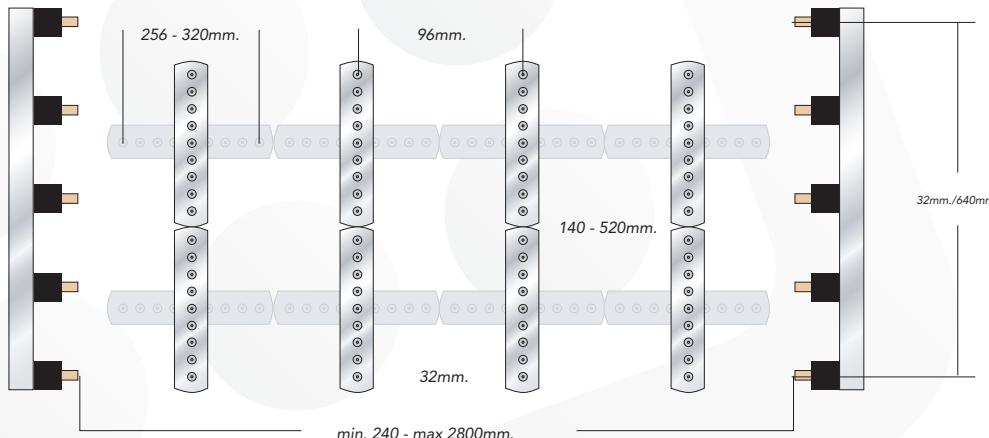

ø6 mm =

ø8 mm =

ø10mm =

20/40mm

Dati tecnici - Technical data - Données techniques - Notas técnicas - Технические характеристики

	Sigma B2	Sigma B2TD
n. teste orizzontali - n. horizontal drilling head	1+1 21+21 spindles	-
Iniettori - Injectors - Injecteur - Injectores - Форсунки.	-	5+5
Capacità di foratura - Boring capacity - Capacité de perçage - Capacidad de trabajo - Производительность	max 27 cycles/min.	max 27 cycles/min.
Profondità di foratura regolabile (mm) - The drilling depth is adjustable - Profondeur de perçage réglable - Profundidad maxima de taladrado - Регулируемая глубина сверления	0-70	0-70
Giri mandrino al minuto - Spindle rotations per minute - Tours du mandrin à la minute - Tours du mandrin à la minute - Скорость вращения шпинделя	2800 g/min.	2800 g/min.
Potenza motore (Hp) - Engine capacity - Puissance moteur - Potencia motor - Мощность двигателя	2,5 (horiz.) 1,5+1,5 (vertical)	- 1,5+1,5 (vertical)
Pressione d'esercizio (atm.) - Pressure - Pression d'exercice - Presion de ejercicio - Давление	6-8	6-8